

MLR122MOD_SS Modular U-Shaped Grab Rail

Note

This product is to be installed by suitably qualified persons, in a fit-for-purpose application, to suitable materials, using suitable fixings, and complying with any relevant codes.

Dimensions


- 1100mmH x 600mmW
- Rail Standoff: 60mm

Hardware Provided

Please be aware that fixings are not included. *It is the responsibility of the installer to ensure that the surface/substrate that the unit is installed upon and the fixings used are suitable to withstand the weight-bearing loads of the unit and if required as per AS1428 / Australia building code regulations.*

Before Installation

- Inspect the product. If there is any damage or missing parts, do not install the product and contact your place of purchase.
- Ensure the wall is either solid or has adequate in-wall support.
- Ensure the wall is plumb/flat without any raised surfaces.

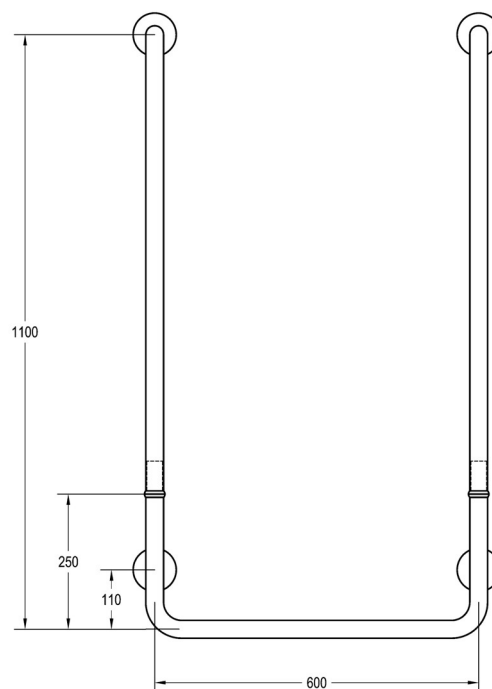

The photographs and line drawings of the products presented above are representational only. Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.

Installation Instructions

Placement may be subject to regulations/codes and architectural drawings. Correct positioning is the responsibility of the installer.

1. Unscrew the cover plates from the mounting flanges by twisting them anti-clockwise.
2. Position the first fixing point of the horizontal part of the grab rail and mark using the mounting holes as a template, ensuring the rail is level.
3. Secure the first mounting flange to the wall using appropriate fixings (not supplied).
4. Secure the second mounting flange, ensuring the rail is level.
5. If the grab rail needs to be adjusted in size, cut the female ends of the grab rail to suit requirements.
6. Insert the vertical parts of the grab rail into the horizontal part and slide the dress rings over the joins. Secure the mounting flanges to the wall, ensuring the rails are level.
7. Slide cover plates over mounting flanges, ensuring the raised edges of the flange lines up with the dimples of the cover plate. Twist in a clockwise direction to lock into place.



Female



Male



This product is AS1428.1 compliant (accessible compliant) when installed in accordance with the guidelines.

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any Commercial product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.

The photographs and line drawings of the products presented above are representational only.
Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.